


# kmN.8

Power, strength and reduced weight.

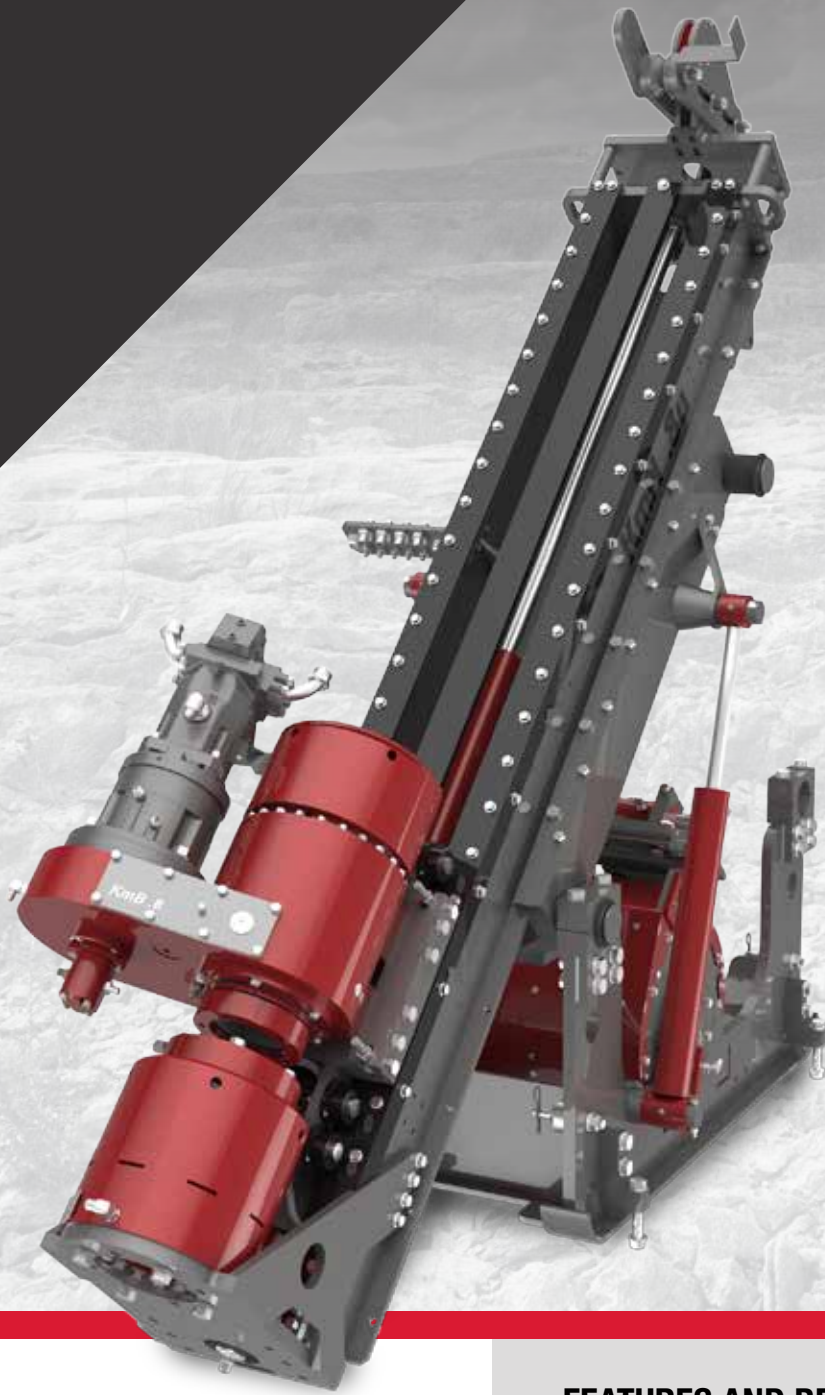

## SPECIFICATIONS

### Rotary head and chuck

Holding capacity	28 000 lb (12 700 kg)
Spindle interior dimension	4.9" (124 mm) PWL Rod
Chuck operation	Spring closed and hydraulically opened
Final drive	HV 60-2 chain in an oil bath
Hydraulic Motor	80 cc variable
Transmission	HI-LO 2 speed mechanic
Rotary Head Ratio	1:2
Lubrication	Pump pressurized, filter and cooler
Speed	0 to 1 300 RPM

## FEATURES AND BENEFITS

- Underground (also available in surface version)
- Heliportable
- Made of steel
- Depth capacity: 800 m (2 625 ft) N size
- Total weight in underground configuration: 11 486 lb (5 210 kg)







**Field** experience, **Real** experience.



Distributor:

240, rue Gilbert-Bosse, Val-d'or, QC, Canada J9P 0H4

1 819 874-4404 [info@versadrillcanada.com](mailto:info@versadrillcanada.com)

[versadrillcanada.com](http://versadrillcanada.com)